

6220



SOFT SERVE FREEZER

Single flavor, Countertop, Gravity feed, Microprocessor control

Product Offering

Offer all popular soft serve variations from low or non-fat ice cream to custards, yogurt and sorbet.

Freezing Cylinder

One, 1.8 quarts (1.7 Liter)

Mix Hopper

One, 8.5 quarts (8 Liters)

Hopper refrigeration maintains mix temperature Below 40°F (4.4°C) during Cool and Standby modes.

Mix Low Indicator

When mix level is low, the Mix Low light turns "ON" to alert operator to add mix.

Standby

Maintains product temperature in the mix hoppers and freezing cylinders below 40°F (4.4°C) during long no-use periods.

Microprocessor Controls

Automatically regulates refrigeration by monitoring product viscosity to maintain consistent quality.

Counter

Records number of dispenses per day and total number of dispenses.

Temperature Display

Displays hopper and cylinder temperature; helps Control product softy

Output

18 Quarts/Hour

Safety Protections

- Low temperature and motor overload cutouts protect from cylinder over freezing
- High pressure switch prevents compressor overheat
- Thermal overload protects from motor overheat



Model 6220



Intertek
4001176



Intertek



Flexible Beater Blade
Higher capacity, higher overrun

Feed Tube

Low Mix Sensor




SPACEMAN USA

CORPORATE OFFICE: 4635 Nautilus Court South - Unit C | Boulder, CO 80301 PHONE:

(888) 610-5520

WEB: WWW.SPACEMANUSA.COM

Model 6220

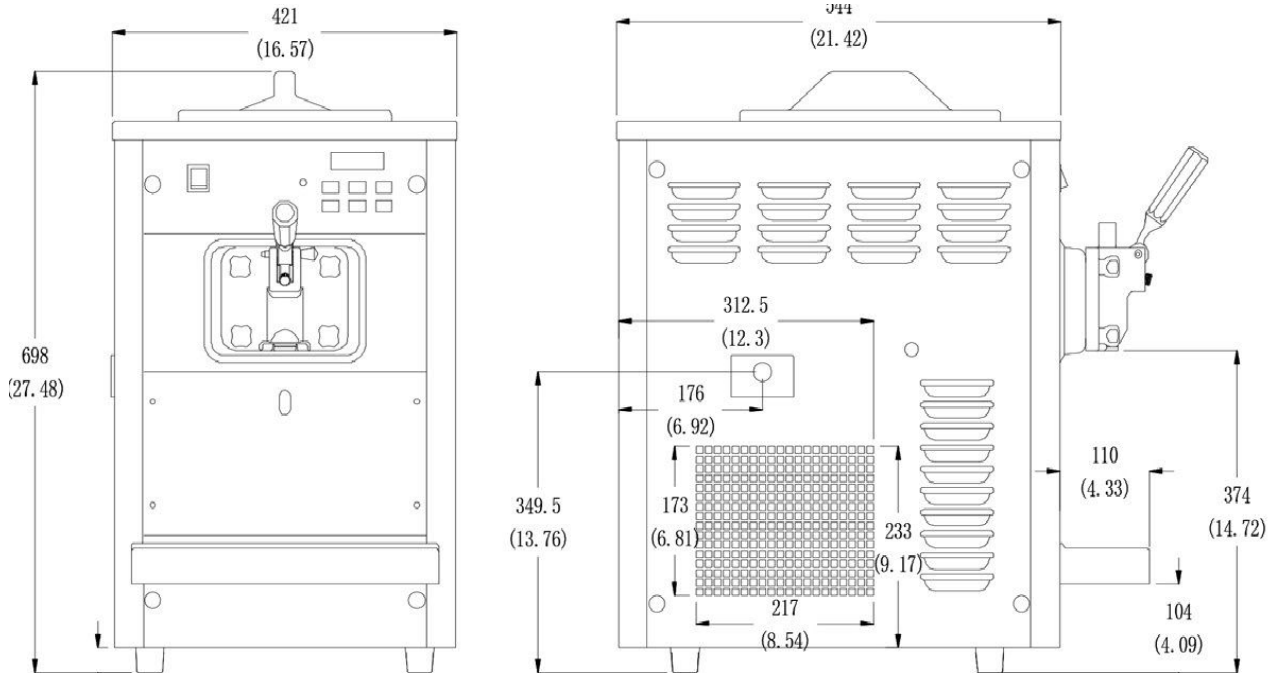

Weight	lb/Kg
Net	203 / 92
Shipping	225 / 102

Packaging Volume 10.13 CBF / 0.29 CBM

Dimensions	Net (in/mm)	Shipping (in/mm)
Width	17 / 421	19 / 477
Depth	21 / 544	28 / 720
Height	27 / 698	33 / 835

Electical	Maximum Fuse Size	Min. Circuit Ampacity	Poles (P) Wires (W)
110-115/60/1	20	16	2P/3W

Plug	Model Number
L5-20	

This unit may be manufactured in other electrical characteristics. Refer to the local Distributor for availability.

(For exact electrical information, always refer to the data label of the unit.)

Note

Continuing research results in steady improvements; therefore these specifications are subject to change without notice.

Specifications

Electrical

One dedicated electrical connection is required. Unit shall be cord connected or permanently connected. Consult your local Spaceman distributor for available cord receptacle specifications as per local codes.

Motor

One, 0.8HP

Refrigeration System

Compressor: One 3,650 BTU/HR, R404A (BTUs may vary depending on compressor used.)

Air Cooled

Minimum clearance of 6" (152mm) on both sides of the machine is required to achieve optimum performance.

The rear of the unit may be placed against a wall. Max room temperature 95° F

Options:

- Air Exhaust Kit
- Local language Control Systems: English, French, Spanish, German, Dutch, Czech, Chinese

